

16

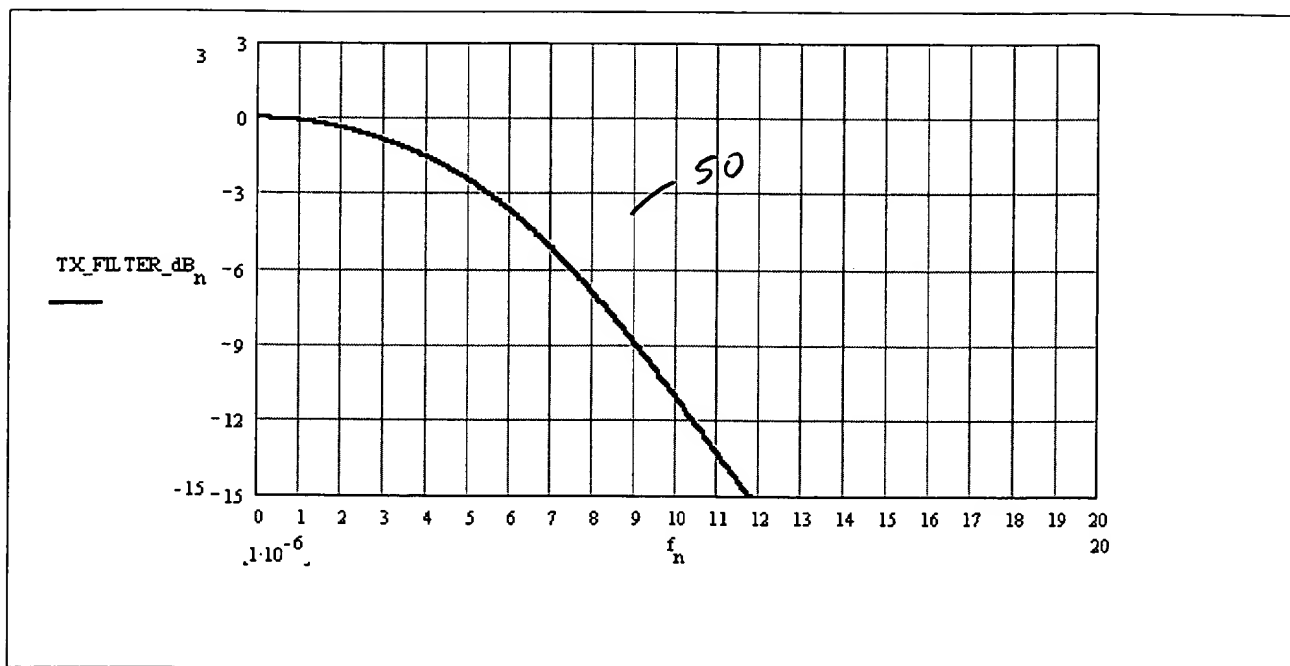


FIG. 2a

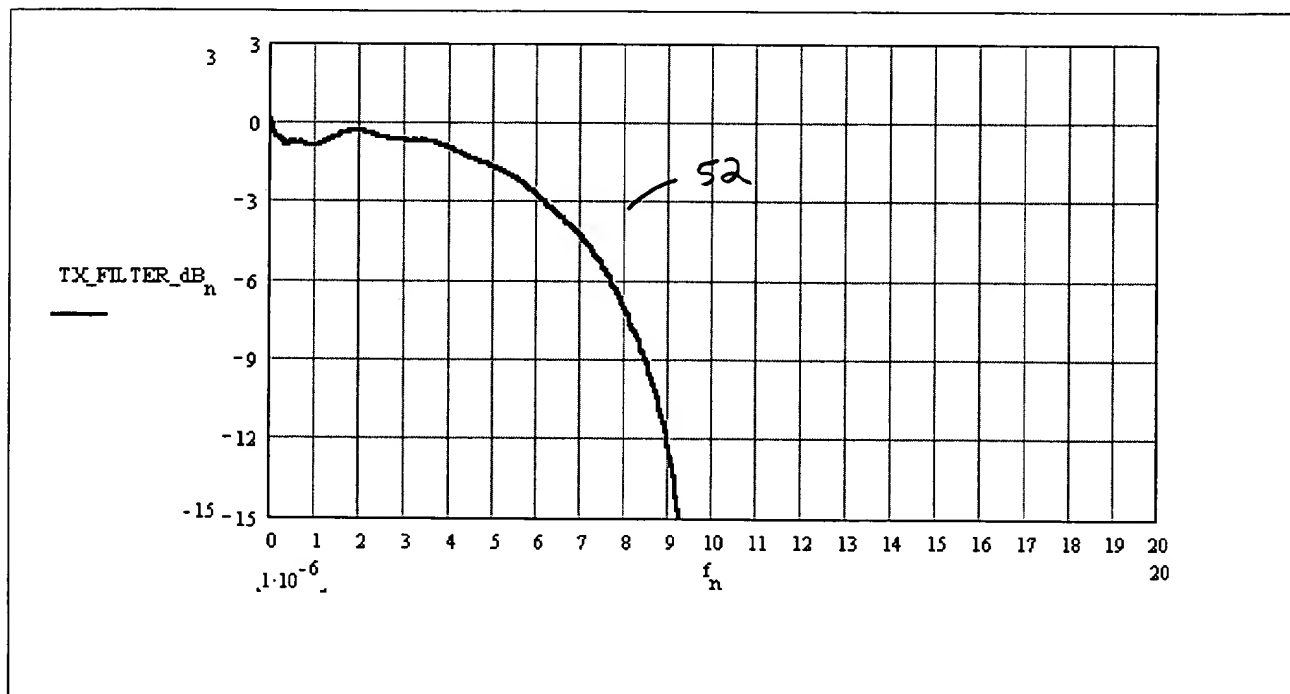


FIG. 2b

%Excess Bandwidth Of Desired Pulse Response's AutoCorrelation	Receiver Peaking (dB re d.c.)	ISI Limited Q (linear, unit-less) At Receiver (n.b. Q=7.13 yields a Bit Error Ratio of 10^{-12})
20	1.73	9.4
25	1.50	9.7
30	1.27	10.9
35	1.12	10.7
40	1.22	9.4
45	1.57	7.9

FIG. 3

FIG. 4a

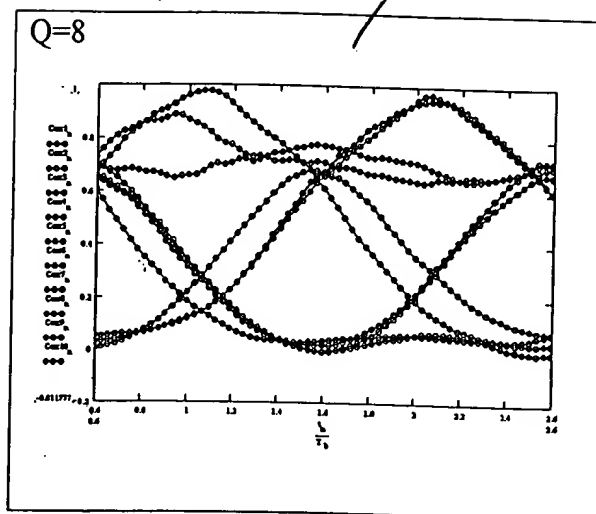


FIG. 4a

Link Dispersion=1600 ps/nm

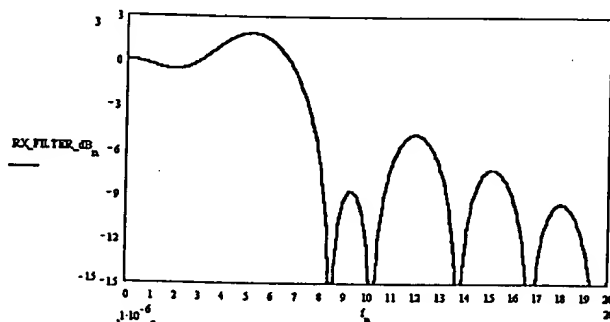


FIG. 4b

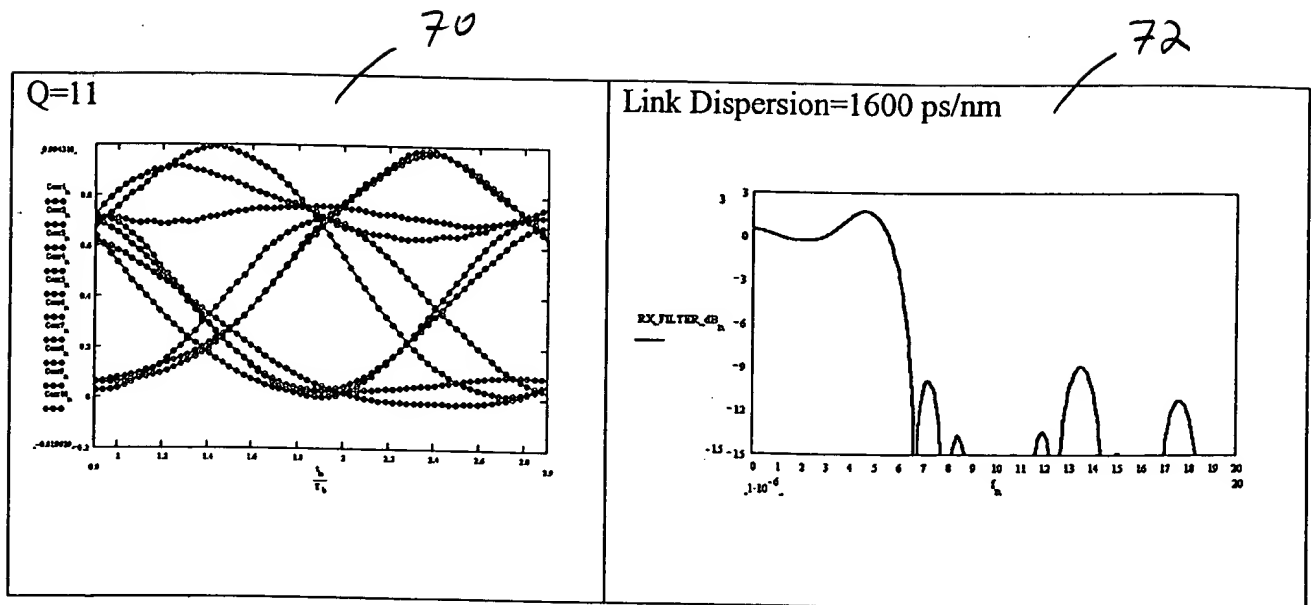


FIG. 5a

FIG. 5b